

5401711

17 JUN 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
26 August 2004 (26.08.2004)

PCT

(10) International Publication Number  
**WO 2004/072591 A1**


- (51) International Patent Classification<sup>7</sup>: **G01F 1/84**
- (21) International Application Number:  
PCT/US2003/003335
- (22) International Filing Date: 4 February 2003 (04.02.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **MICRO MOTION, INC.** [US/US]; 7070 Winchester Circle, Boulder, CO 80301 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **BELL, Mark, James** [US/US]; 15710 West 66th Place, Arvada, CO 80007 (US). **LOVING, Roger, Scott** [US/US]; 2160 James Canyon Drive, Boulder, CO 80302 (US). **DILLE, Joseph, C.** [US/US]; 628 Cowpath Road, Telford, PA 18969 (US).
- (74) Agents: **DUFT, Donald, M. et al.**; Duft Setter Ollila & Bornsen LLC, 2060 Broadway, Suite 300, Boulder, CO 80302 (US).

- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17:**  
— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC,

[Continued on next page]

(54) Title: **LOW MASS CORIOLIS MASS FLOWMETER HAVING A LOW MASS DRIVE SYSTEM**

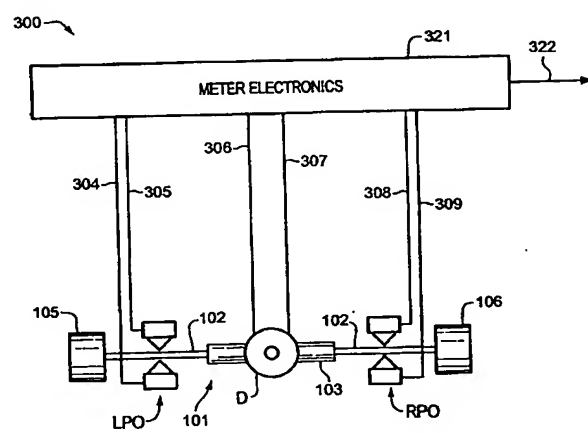

(57) **Abstract:** A Coriolis mass flowmeter (300) having a low mass drive system comprising a driver coil (D) for vibrating flow tube means (102). The Coriolis mass flowmeter does not use a magnet affixed to the flow tube means. Instead, the flow tube means is coated with or is integral to magnetic material (103) that responds to the magnetic fields generated by the driver coil to vibrate the flow tube means. The flow tube means may comprise one (102) or more (1402C1, 1402C2) flow tubes. The magnetic material may be ferrous material devoid of an internal magnetic field. Alternatively the magnetic material may be steel or stainless steel having internal magnetic fields.

WO 2004/072591 A1